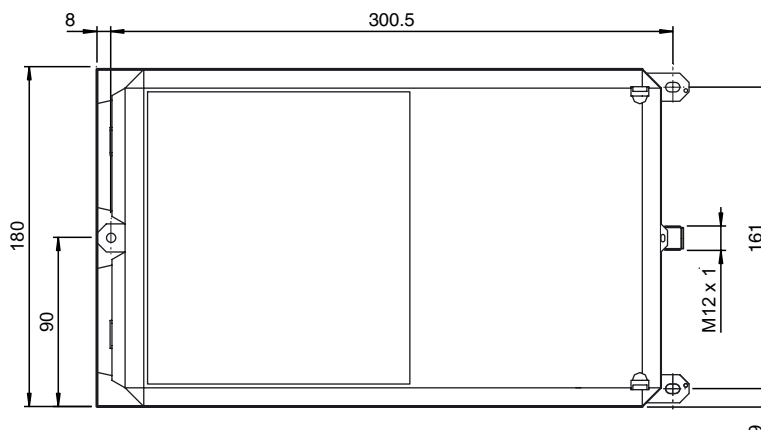
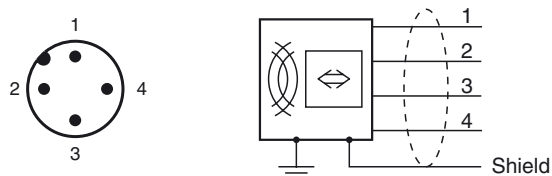


**Model Number****IUH-F117-V1-EU**Read/write head
for IDENTControl Compact**Features**

- 3 LEDs for function indication
- Connection via V1 (M12 x 1) plug connection

Dimensions**Electrical connection****Technical data****General specifications**

Operating frequency	865.1 ... 867.9 MHz
Emitted power	ERP 2 W
Operating distance	maximum: 6 m

Indicators/operating means

LED green/yellow	green: power on green flashing: read/write attempt performed Yellow: command executed
------------------	---

Electrical specifications

Power consumption	P_0	≤ 30 W
Supply		from the IDENTControl

Ambient conditions

Ambient temperature	-25 ... 55 °C (-13 ... 131 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)

Mechanical specifications

Protection degree	IP54
Connection	M12 x 1 connector
Material	
Housing	aluminum / ABS
Mass	approx. 3.1 kg

Compliance with standards and directives

Directive conformity	
R&TTE Directive 1995/5/EC	EN 301489-1 V1.9.2:2011 EN 301489-3 V1.4.1:2003 EN 302208-2 V1.4.1:2012 EN 60950-1:2006/A1:2010 EN 50364:2010
Standard conformity	
Protection degree	EN 60529:2000



Function

The read/write head IUH-F117-V1-EU operates in the UHF frequency range. The read/write head is optimized for greater distances by the use of a highly sensitive transmitting and receiving unit. The device reads and writes passive tags according to EPC Gen2 (ISO/IEC 18000-63). The implemented dense reader mode according to ETSI EN 302208-1 avoids mutual interference of closely adjacent read/write heads.

The read/write head supports extensive possibilities for data filtering. The read/write head is connected to the IDENTControl control interface via an M12 connector. The status of the read/write head is displayed via the built-in LEDs.

The read/write head has a typical detection range of about 5 m. The detection range is influenced by the tag used and can be adjusted with the transmission power. Other influencing factors are the mounting for the specific application, the influence of present materials (especially metal) and environmental conditions. The separately specified read and write distances for the respective tags have been determined in a test laboratory under ideal conditions. Thus try the combination of read/write head and tag for the desired application under real conditions.

Release date: 2014-01-15 11:27 Date of issue: 2014-01-15 233534_eng.xml

Accessories**IUZ-MH10**

Mounting accessories for wall mounting

IUZ-MH11

Mounting accessories for pole mounting

V1-G-5M-PUR-ABG-V1-W

Connecting cable, M12 to M12, PUR cable 4-pin, shielded

V1-G-10M-PUR-ABG-V1-W

Connecting cable, M12 to M12, PUR cable 4-pin, shielded

IUC72-F151-M-FR1

Data carrier

IUC72-F152-M-FR1

Data carrier

IUC76-50-M-FR1

Data carrier

IUC76-50-FR1

Data carrier

IUC76-F157-M-FR1

Data carrier

IUC76-F203-M-FR1

Data carrier

IC-KP-B17-AIDA1

Control interface unit IDENTControl with Ethernet interface

IC-KP2-1HRX-2V1

Control interface unit
IDENTControl Compact
with serial interface

IC-KP2-2HRX-2V1

Control interface unit
IDENTControl Compact
with serial interface

IC-KP2-1HB6-V15B

Control interface unit
IDENTControl Compact
with interface for PROFIBUS DP

IC-KP2-1HB6-2V15B

Control interface unit
IDENTControl Compact
with interface for PROFIBUS DP

IC-KP2-2HB6-V15B

Control interface unit
IDENTControl Compact
with interface for PROFIBUS DP

IC-KP2-1HB17-2V1D

Control interface unit
IDENTControl Compact
with Ethernet interface

IC-KP2-2HB17-2V1D

Control interface unit
IDENTControl Compact
with Ethernet interface

Release date: 2014-01-15 11:27 Date of issue: 2014-01-15 233534_eng.xml